

seiris

E X P A N S I O N J O I N T S

COMPANY PROFILE

- Headquarters in Paris :

SEIRIS S.A.S,
Z.I Panhard, Chemin de la Julienne,
91 830 Le Coudray Montceaux, France
Tel : +33.1.69.01.20.39
Fax : +33.1.69.01.33.33
E-mail : info@seiris-sa.com
Website : www.seiris-sa.com

- Creation in 1978, almost 35 years developing, manufacturing, selling and installing expansion joints, flexible connections for piping and ducting systems.
- Serving any type of heavy industry with our wide range of FABRIC, METAL and RUBBER EXPANSION JOINTS (coal, gas, biomass fired power plants, hydro power plants, water desalination plants, cement plants, chemical plants, steel plants, chemical and petrochemical plants) ...
- Operating internationally, we are present in Europe, Middle East North Africa (MENA), India and South East Asia. Our expansion joints are installed worldwide !
- Production facilities in Paris (France), Sousse (Tunisia), Hyderabad (India), Izmir (Turkey)
- Tailor Made fabrications according to Dimensions, Shapes and Operating Conditions of our client's most critical applications.
- Manufacturing and testing our products according to internationally recognized standards (E.S.A, F.S.A, E.J.M.A, ASME, AD MERKBLATTER, ASTM, ABS...)
- More than simple products, SEIRIS is offering complete solutions from the design to the installation of these expansion joints.
- Our Clients from these very different industries are our R&D experts.




seiris

E X P A N S I O N J O I N T S

PRODUCTS


• FABRIC EXPANSION JOINTS

Single Layer or Multiple Layers
 U-Type or Belt Type configuration
 With or without Bolster (insulation)
 With or without steel frame
 Materials : Technical textiles
 Temperature : up to 1 200 °C
 Pressure : up to 0,25 bar

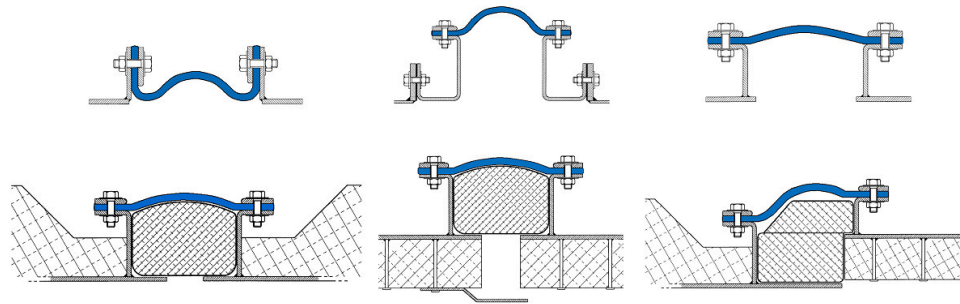

• METAL EXPANSION JOINTS

Single ply or Multiple plies
 Single convolution or Multiple convolutions
 To be welded or flanged Type configuration
 Materials : Carbon steels, Austenitic stainless steels, Nickel Alloys
 Temperature : up to 1 200 °C
 Pressure : up to 120 bars

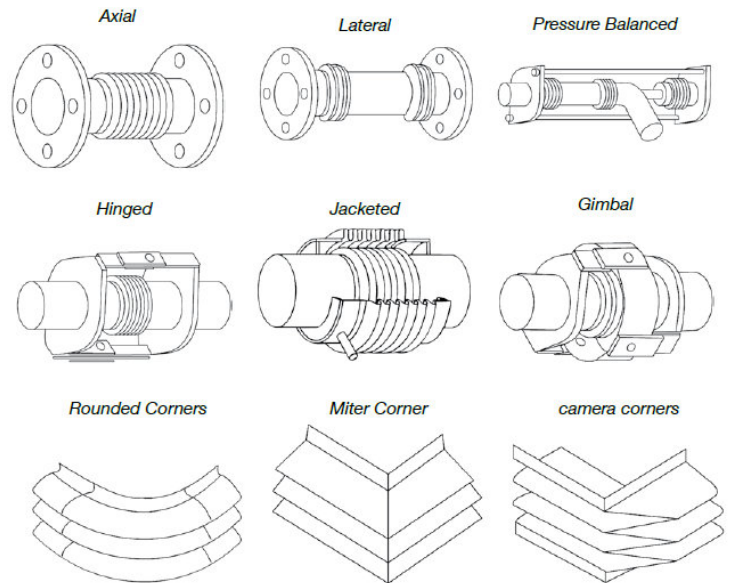

• RUBBER EXPANSION JOINTS

Single ply or Multiple plies
 Single convolution or Multiple convolutions
 Swivel or Full Face flanges Type configuration
 Materials : Wide range of rubber
 Temperature : up to 200 °C
 Pressure : up to 25 bars



seiris

E X P A N S I O N J O I N T S

REFERENCES

ALSTOM


ArcelorMittal

 **Ciments Calcia**
Italcementi Group

 **cmi ENERGY**


edf


fives fcb



 **Petkim**

 **LAFARGE**



REPSOL


 **Rhodia**


SANOFI




TOTAL

 **VEOLIA**
ENVIRONNEMENT

 **çimentaşgroup**
CEMENTIR HOLDING


ESSAR 

 **HAMON**

seiris

E X P A N S I O N J O I N T S

FABRIC EXPANSION JOINTS

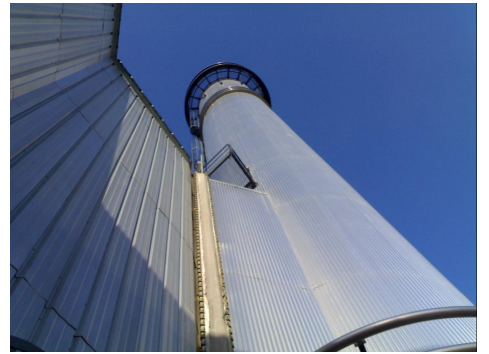

METAL EXPANSION JOINTS



RUBBER EXPANSION JOINTS

